



Features & Benefits

- High energy density and voltage
- Long stable power with flat discharge voltage
- Ideal for portable communications, portable computing and robotics


Specifications

Capacity: 2.9Ah Typical
 (Charge: CVCC, 4.2V, max. 1925mA, 50mA cutoff, 25°C)
 (Discharge: CC, 550mA, 2.5V cutoff, 25°C)


Nominal Voltage: 3.6V

Weight: Approximately 44.5g


Dimensions

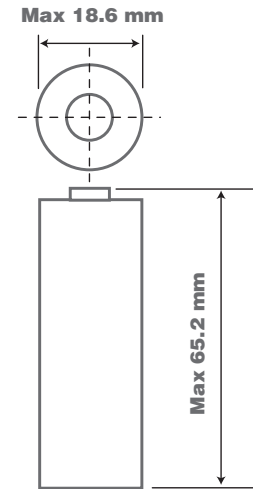


Charge Characteristics

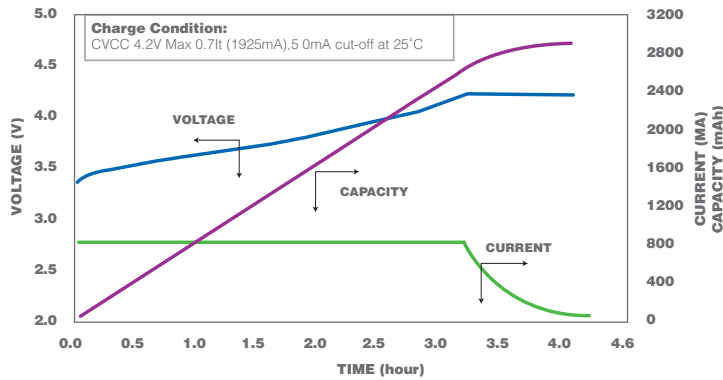


Discharge Characteristics

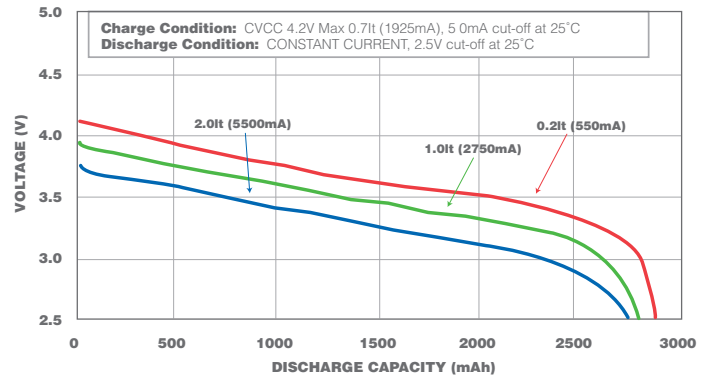

Discharge Characteristics

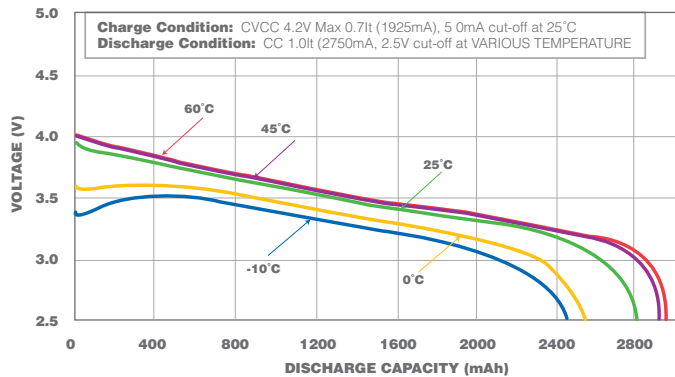

Cycle Life Characteristics (25°C)

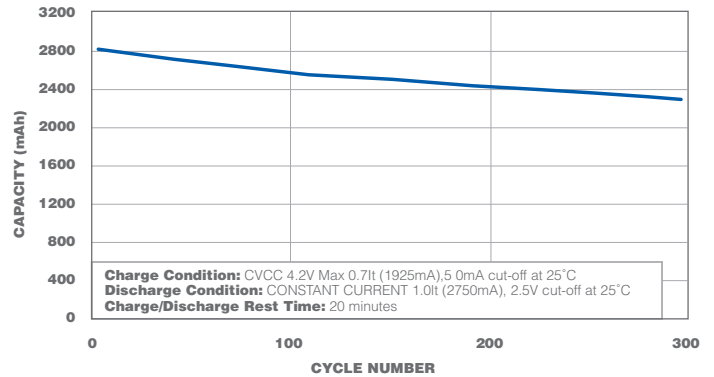

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.